



BAÑADOR DE MURO STIL LED 100CM 22W



*Todos nuestros productos cumplen RETILAP

*Imagen de referencia




Información Técnica

Dimensiones

Familia	Gold Arquitectónica
Tipo de Fuente	LED
Certificado RETILAP	SLBAÑADOR-SAMSUNG-PLATINO-22W
Uso de la Luminaria	Exterior
Hermeticidad Luminaria	IP65
Driver	Stil Led
Hermeticidad Driver	IP67
Atenuación	No
Voltaje de Operación	85 - 277VAC
Frecuencia	50/60HZ
Potencia Nominal	22W
Potencia Real	20.92W
Flujo Luminoso(Lm)	1777.9Lm
Eficacia lumínica	85.03Lm/W
Temperatura de Operación	0°C hasta 40°C
Reproducción de Color IRC	≥70
Ángulo de Apertura	28°
Temperatura del Color	3000K - 4000K - 6500K
Sistema de Fijación	Anclaje con Soportes
Factor de Potencia	0.99
Distorsión Armónica	≤20% (V: 0.8% I: 6.3% @119.7VAC)
Protección Eléctrica	Clase I
Accesorios	N/A

The diagram illustrates the dimensions of the robotic arm. The total length is labeled (L) above the arm. A cross-section is shown with three dimensions: (A) for the height of the base, (An) for the width of the base, and (Ab) for the height of the upper arm segment. The arm itself is depicted as a series of white circles connected by lines, representing the joints and links.

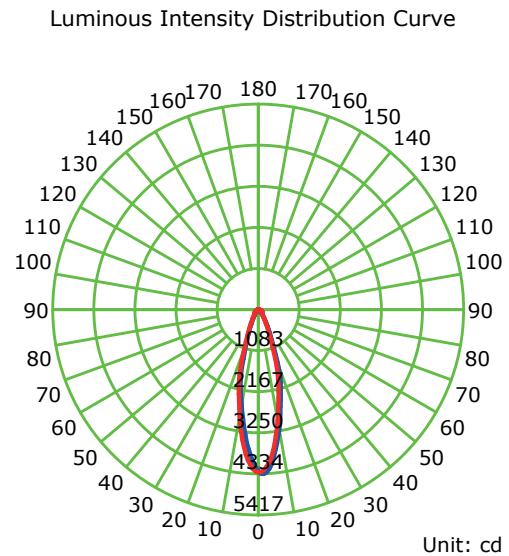

*Datos técnicos sujetos a cambios

*Los valores técnicos pueden presentar una variación de $\pm 10\%$.